
Installation of EGT Gauge

SMOKE GAUGE SERIES GREEN & WHITE LED DISPLAY


- 1. Before installation, please make sure that the exhaust hose and engine both cool off completely.
- 2. You should have minimum knowledge of car mechanical. You may consult with your car repair shop for assistance before installing, or send directly to your car repair shop for complete installation.
- 3. After deciding the position to install the sensor, you should drill a hole of PT 1/8 NPT thread. Clean the hole and be sure to avoid any iron scrap falling into the hole.(see diagram A).

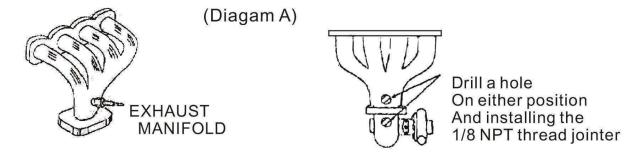

(Diagam A)

1. First secure 1/8 NPT adapter into the hole by hand, and then turn 1.5-2.5 threads using 12 m/m wrench with torque of around 0.3-0.5 kgfm.(see diagram B).

Sensor is placed in $1/3 \sim 1/2$ depth of the exhaust hose

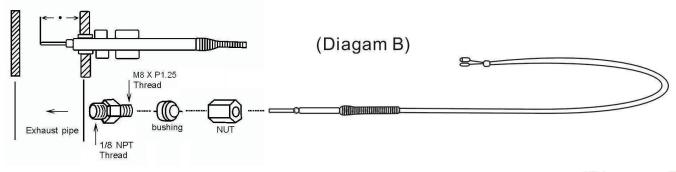

(Diagram B)

- 5. Installation of sensor: After PT 1/8 NPT adapter is securely fastened, insert bushing and nut in sequence. Sensor is placed in 1/3-1/2 depth of the exhaust hose. (see diagram B).
- ★Choose the mounting position of sensor carefully. Bushing is used to avoid displacement of the sensor. Ater fitting screw nut on to bushing, use 12 m/m wrench to tighten screw nut.
- ★Connecting torque shall be within 2~2.3kgfm. The sensor may easily fall off, if it is properly fastend.
- 6. The sensor cable should be properly mounted on the wall of engine compartment and should be kept away from heat.

7. Wiring by Color

- a. Red \rightarrow V + 12V
- b. Black → Ground
- c. Orange OR WHITE->
- d. Pink \rightarrow Sensor +
- e. Blue \rightarrow Sensor -

NOTE:GAUGE REQUIRE FUNCTION		
REQUIRE FUNCTION		TATOMA I ATTION
DAY TIME	NIGHT TIME	INSTALLATION
WHITE SCALE	WHITE SCALE	WHITE WIRE→connect to ACC. ORANGE WIRE→NO connect
GREEN SCALE	GREEN SCALE	WHITE WIRE→NO connect ORANGE WIRE→connect to ACC.
WHITE SCALE	GREEN SCALE	WHITE WIRE→ connect to ACC ORANGE WIRE→connect to headlights 12v+
GREEN SCALE	WHITE SCALE	WHITE WIRE→connect to headlights 12v+ ORANGE WIRE→connecto to ACC.