

ELECTRICAL GAUGES


SMOKE LENS SERIES SUPER WHITE LED DISPLAY

(270° SCALE)

Tachometer

OPENING CEREMONY


1

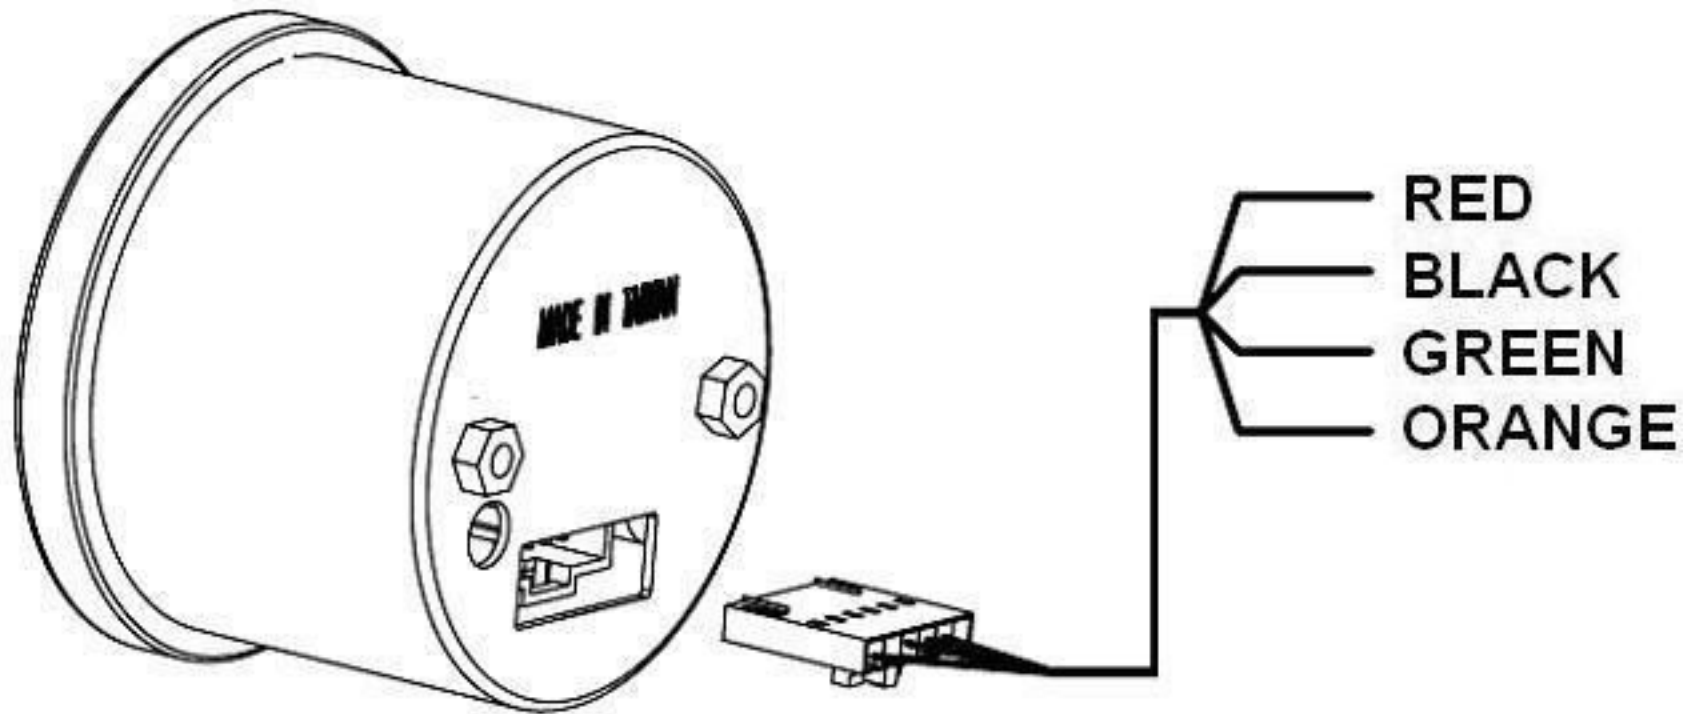


RED
BLACK
GREEN
ORANGE

RED - TO IGNITION SWITCH 12V(+)
BLACK - BATTERY (-)
GREEN - ON STANDARD IGNITION GREEN WIRE ATTACHES TO COIL NEGATIVE (-)
ORANGE - DIMMER/+12 VOLTS TO DIM CONNECT TO HEADLIGHT TO ACTIVATE


2

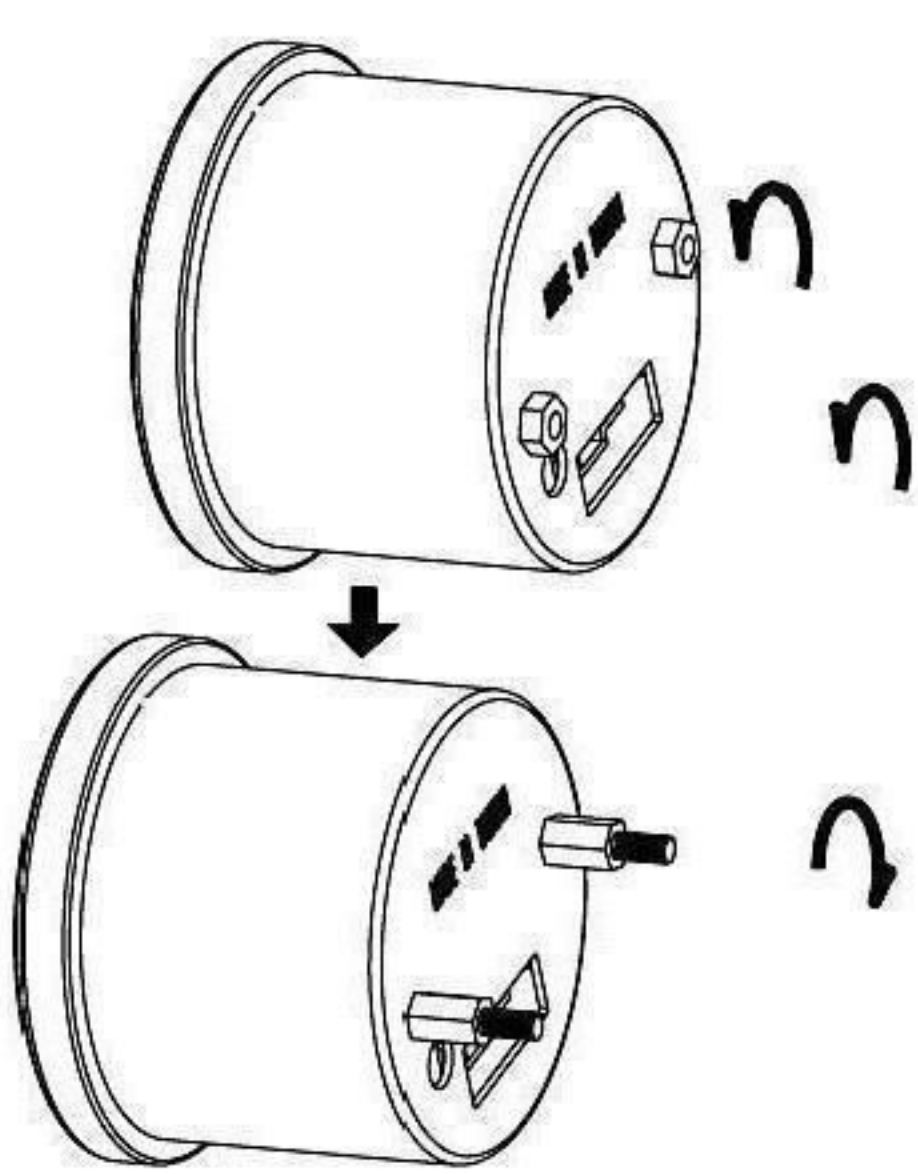

3

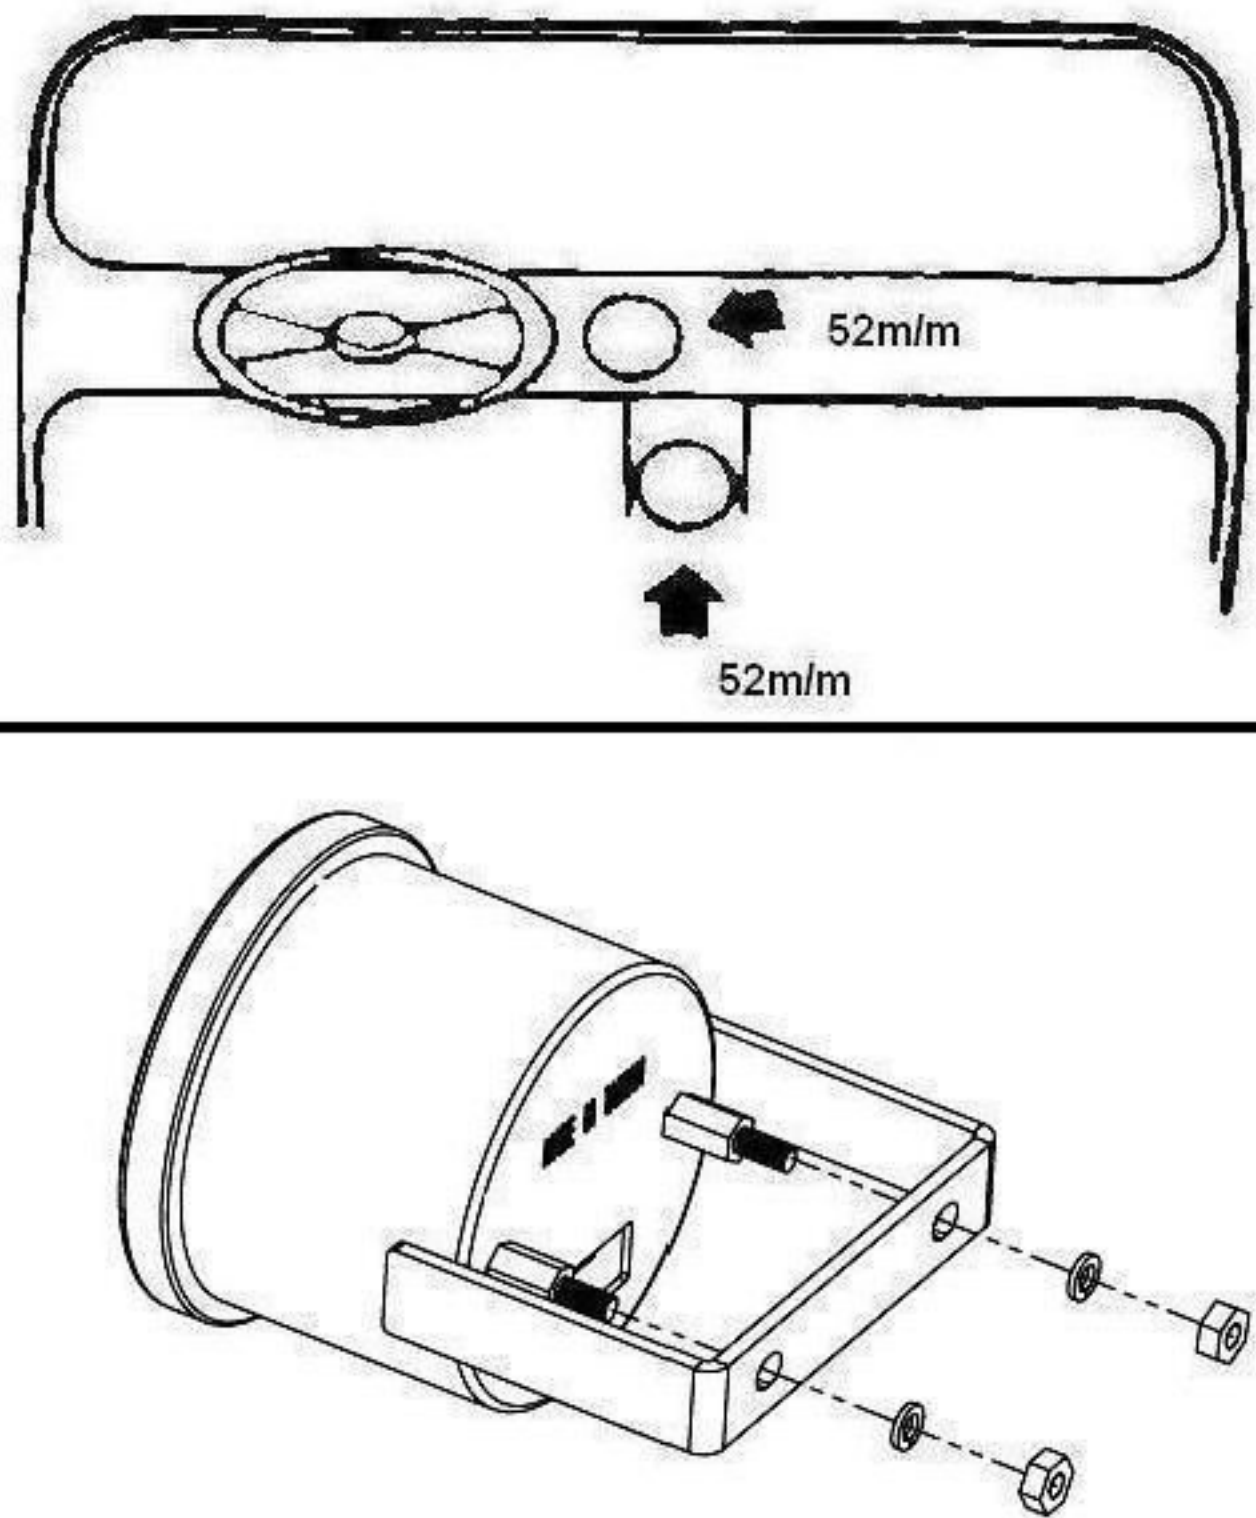


4

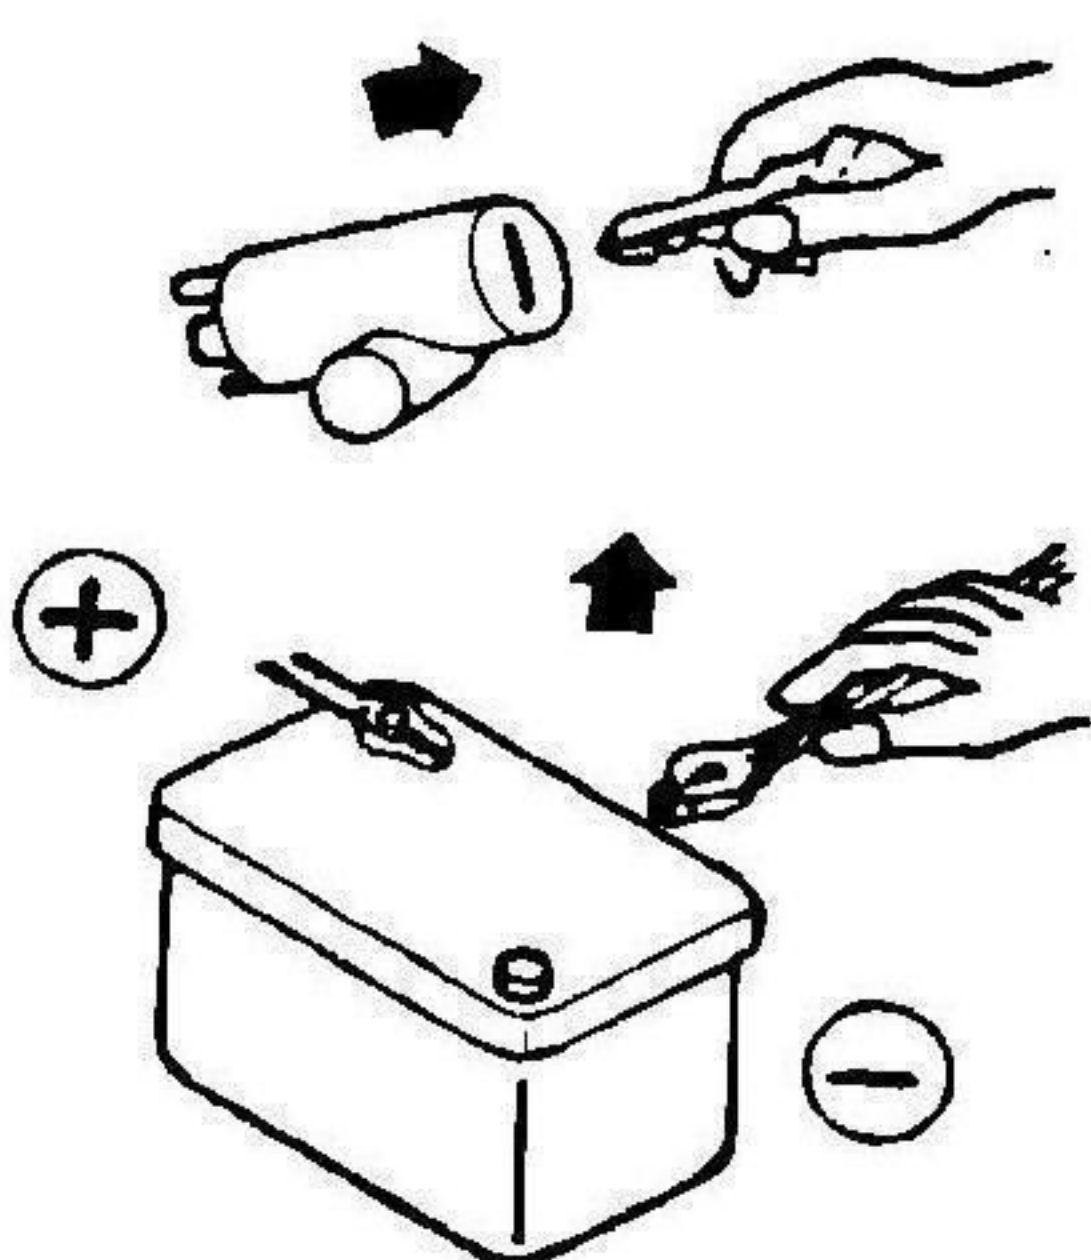

5

CYLINDER SELECTION SWITCH

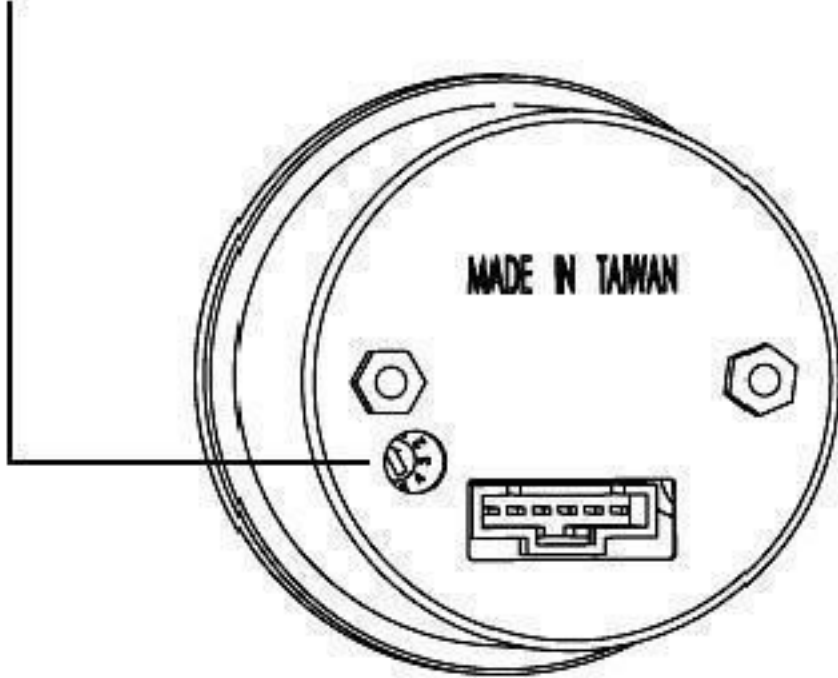


1. Selecting Number of Cylinders:
Setting the tachometer for 4, 6 or 8 (4, 6 or 3) cylinder operation is achieved simply by sliding the switch, located on back of the tachometer body, to coincide with the appropriate number of cylinders of the engine.

2. Switch position:
0=10 cylinders, 1=1 cylinders, 2 = 2 cylinders
3=3 cylinders, 4=4 cylinders, 5=cylinders,

3. When setting the number of cylinders for a rotary engine, set the cylinders number selection to 4 cylinders for 2 rotors, and to 6 cylinders for 3 rotors.

4. The red or black wire MUST be removed before adjustment to the cylinder setting is made from the cylinder selector switch.

6

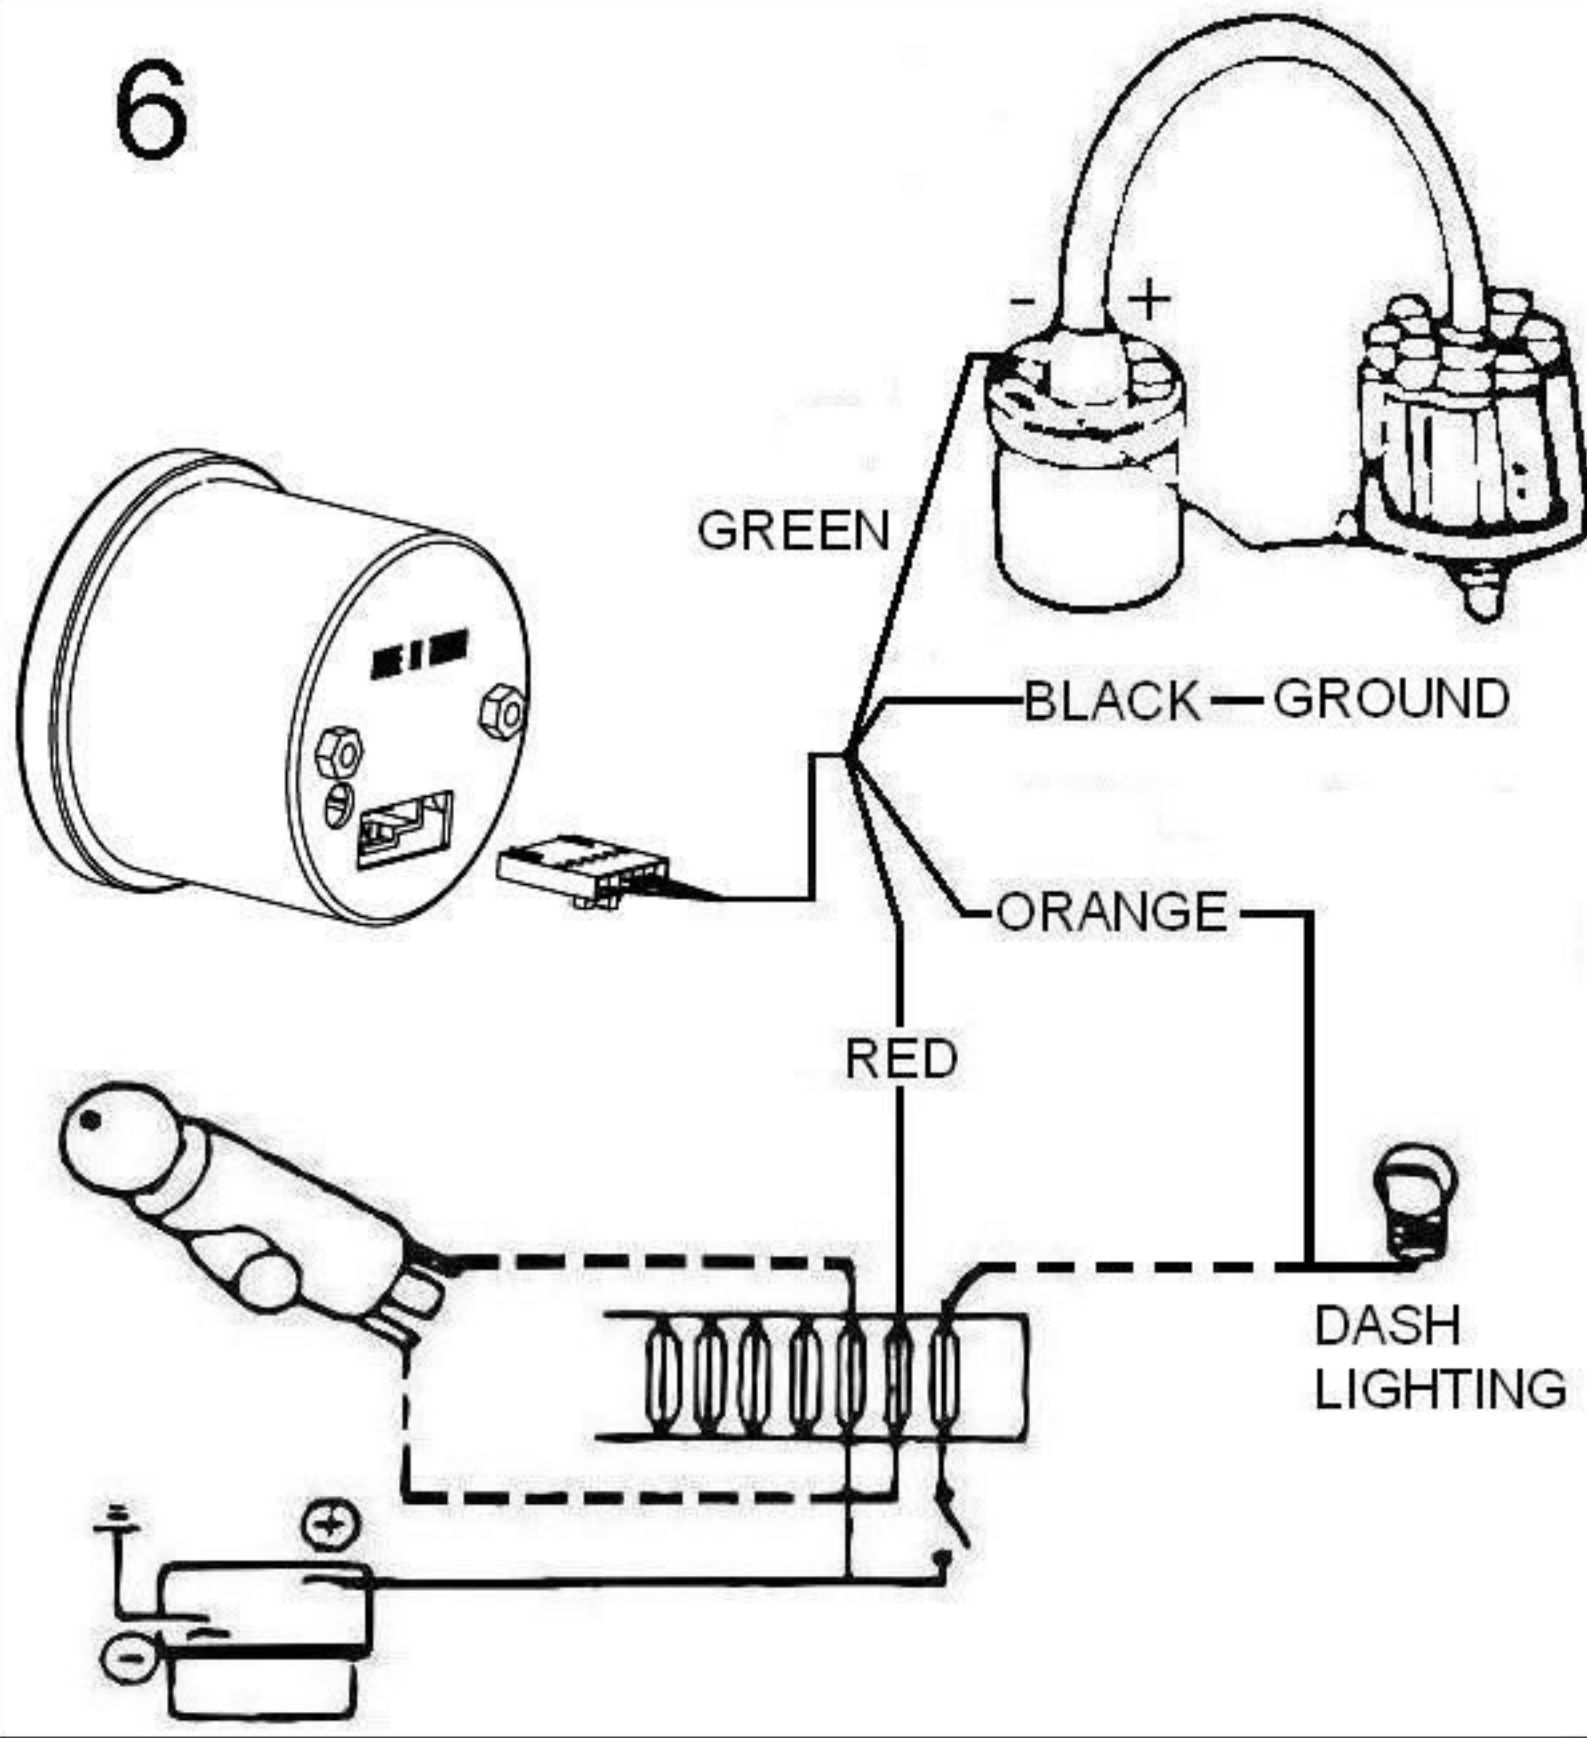

7

